



Forming The Future™

PATTERN 16956

Corps Fin

1.25" Depth, 2" On Center




GrayLastic™

Elastomeric Urethane - up to 100 uses.
Mold bonded to 0.75" plywood. Add 1.125" to liner thickness.

Fractured Fin

Part Size: 48"W x 120"H
Max Depth: 1.25"
On Center: 2.0"
Peak: 0.75"
Valley: 0.75"
Draft: 0.25"

0.125" Continuous Flat All Ribs

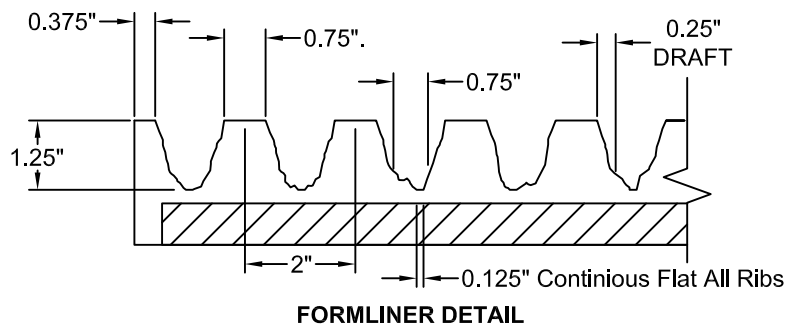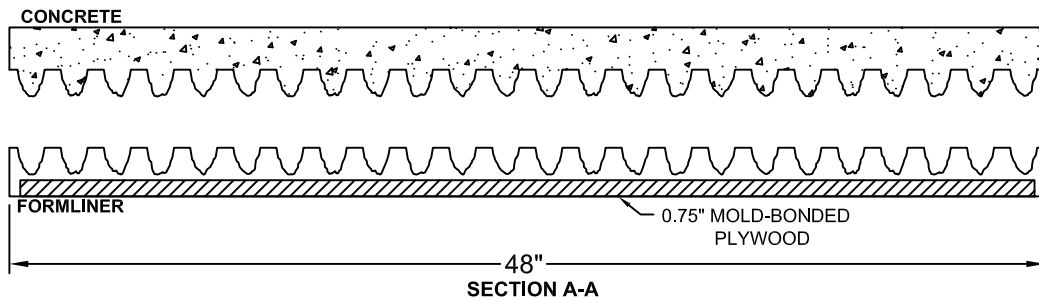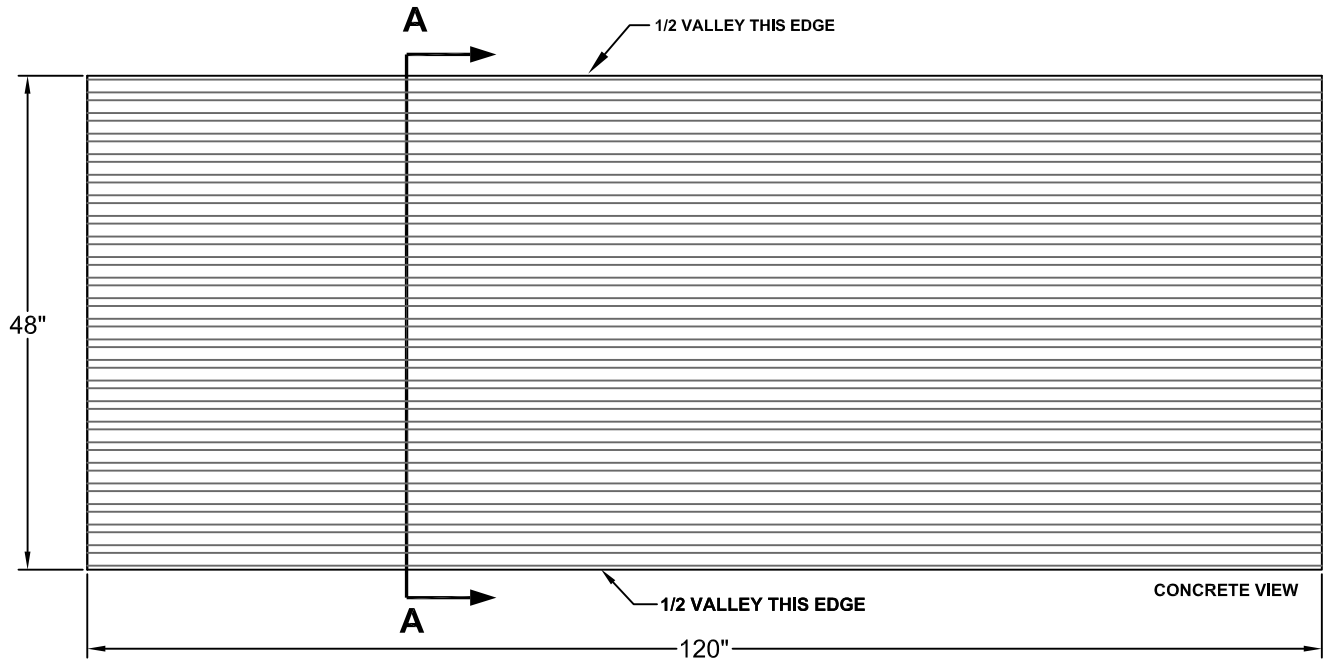

This document contains confidential and proprietary information of Fitzgerald Formliners, Inc. and is protected by copyright, trade secret, and other state and federal laws. Its receipt or possession does not cover any rights to reproduce, disclose its contents, or to manufacture, use, or sell anything it may describe. Reproduction, disclosure, or use without specific written authorization of Fitzgerald Formliners, Inc. is strictly forbidden.