

PATTERN 16990 Light Sandblast

No Aggregate Exposed


GrayLastic™

Elastomeric Urethane - up to 100 uses. Mold bonded to 0.75" plywood. Add 1.125" to liner thickness.


Part Size: 48"W x 120"H Max Depth: 0.0625"

Sandblast

Forming The Future

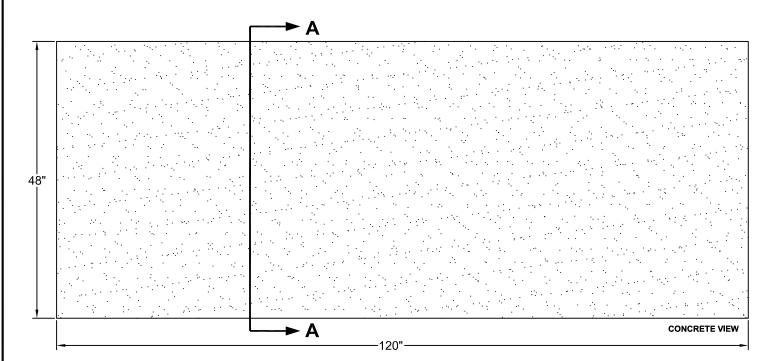


CONCRETE





SECTION A-A

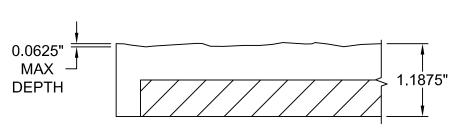

FORMLINER DETAIL

This document contains confidential and proprietary information of Fitzgerald Formliners, Inc. and is protected by copyright, trade secret, and other state and federal laws. Its receipt or possession does not cover any rights to reproduce, disclose it's contents, or to manufacture, use, or sell anything it may describe. Reproduction, disclosure, or use without specific

1500 East Chestnut Avenue • Santa Ana, CA 92701 • Fax (714) 245-9715 Ph: (800) 547-7760 • Ph (714) 547-6710 • www.formliners.com Pattern can be requested in AutoCad format.

File Name: S-16990-GR-9-22-09

Page 1 of 1